



## **Estimation of Leachate Generated from Zimbabwe's Municipal Solid Wastes (MSW) Landfills using a Simple Stochastic Water Balance Model**

**Andile B. Maqhuzu<sup>\*</sup>, Kunio Yoshikawa, Fumitake Takahashi**

Department of Transdisciplinary Science and Engineering, Tokyo Institute of Technology, Tokyo, Japan

<sup>\*</sup>Corresponding author: Email: [maqhuzu.a.aa@m.titech.ac.jp](mailto:maqhuzu.a.aa@m.titech.ac.jp)

### *Article History*

Submitted: 6 August 2017/ Accepted: 8 November 2017/ Published online: 23 May 2018

Part of this manuscript was presented in the 4<sup>th</sup> EnvironmentAsia International Conference on Practical Global Policy and Environmental Dynamics, June 21-23, 2017, Bangkok, Thailand.

### **Abstract**

Landfilling remains the predominant component in the waste management hierarchy of most developing nations. The adoption of emerging waste management technologies and the use of recycling or composting is still in its infancy. Among several inadequacies of current waste management practices in Zimbabwe is the absence of sanitary disposal of municipal solid waste (MSW) in landfills. As a result, the leachate generation rate and leachate characteristics are not routinely monitored. Such information is essential when assessing the impact of leachate on ground and surface water or a facility to which the leachate can be conveyed. Indiscriminate disposal of MSW at unsanitary dumpsites poses a double threat as the discharge of hazardous leachate to potable water sources and emissions of toxic odours leads to further environmental degradation. Poor waste management practices are compounded by a lack of financial resources and technical capabilities. The financial incapacitation of local authorities is reflected in the fact that there are no reliable statistics on MSW generation and disposal. This lack of comprehensive data has hampered the quantification of MSW and resultant leachate. Therefore, the objectives of this study are twofold. First, we seek to predict the annual quantity of landfilled MSW, and secondly to quantify the leachate flow from Zimbabwe's landfills. Both were achieved through the use of probability models and a stochastic water balance method supported by 10,000 Monte Carlo iterations. The calculated 90 % confidence interval indicates that 13-16 million tons of MSW have been landfilled, with about 41-128 million m<sup>3</sup> of leachate released since 1980. This is equivalent to a mean of 414,212 tons a<sup>-1</sup> of landfilled MSW and 2.2 million m<sup>3</sup> a<sup>-1</sup> of leachate generated, respectively.


**Keywords:** Water balance; Monte Carlo; Leachate; Zimbabwe; MSW; Probability model

## Introduction

Landlocked and situated in the southern hemisphere, Zimbabwe is a country troubled by environmental degradation due to poor waste management. With a total land area of 390,757 km<sup>2</sup>, the nation is bordered by Mozambique, South Africa, Botswana, and Zambia to the east, south, west and north, respectively. Zimbabwe's population reached 7.7 million in 1982 according to census data. The country's first 10 million was reached in 1992 with the 15-million mark surpassed in 2015. The urban population has grown from 1.6 to 5.2 million between 1980 and 2016 [1-2], presenting many emerging challenges for local authorities who have inadequate capacity to effectively handle the solid waste generated. This has been compounded by an ailing economy which saw a sharp decline in GDP per capita between 1980 and 2009 [3]. Local authorities lack adequate infrastructure, financing and labour, among other factors. These complexities have adversely affected the waste management system which is characterized by low collection efficiencies, high crude tipping rates, on-site burning of waste, and the buildup of garbage in drainage systems, waterways, and streets [4]. Landfills are predominantly used for final municipal solid waste (MSW) disposal albeit without the necessary leachate collection systems at most sites. Nearly 98 % of these landfills are not sanitary [5] but are open dumps, as little to no final cover is applied. One of the largest dumps is Pomona located in the capital city as shown in Figure 1. Reports of groundwater contamination have been verified by rising levels of trace elements such as lead, mainly due to the unconfined leachate entering potable water sources from nearby landfills [6-8].

A quick survey of the scientific literature reveals that few attempts have been made to quantify the leachate discharged from Zimbabwe's landfills, the intricacies of which are magnified by the lack of a historical solid

waste database. This has hampered the quantification of the amount of MSW landfilled and leachate generated. Reports that have been trickling in since the early 2000s have focused on Zimbabwe's solid waste composition, energy potential, its impact and possible solutions and technological remedies to challenges encountered in the sector [4-6, 9-30]. Due to a lack of field monitoring data to evaluate seepage from the existing landfills and limited studies on the estimation of leachate generation from Zimbabwe's landfills, this study will bridge a gap for other environmental studies. This paper could help in the investigation of groundwater vulnerability in the vicinity of landfills and to estimate the cost of remediation or setting-up of landfill leachate collection systems.

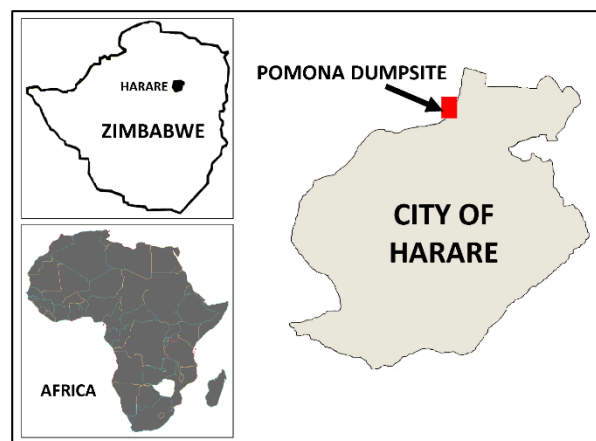

**Figure 1** Maps showing location of Pomona dumpsite in Harare. The city of Harare is the largest in terms of population size and area. The city is located at 17.8° S 31.0° E on the north-east side, on the outskirts of Harare, Pomona municipal landfill is neither lined nor covered daily.

Approaches to predicting leachate generation categorically fall into either of the following five groups: the water balance method, computer modeling- water balance method combinations, empirical equations, mathematical models and direct infiltration measurements [31]. Zimbabwe is classified as a semi-arid country with at least

85 % of the country receiving no more than 800 mm of rain annually. Furthermore, rainfall is concentrated between November and March [32]. Precipitation can thus be expected to contribute to leachate generation as landfills are of inferior design. The Water Balance Method (WBM) adopted in this study allows a relatively simple computation compared to other methods. WBM is particularly appropriate for landfills in which a relatively high permeable layer of soil is used as final cover. Water infiltration and leaching are drastically reduced when a synthetic membrane is used as a covering. Despite extensive use of WBM, field verification revealed significant margins of error between predicted and actual leachate quantities [31]. Too often, minimal account is taken of the uncertainty surrounding the spatial and temporal heterogeneity that characterizes the leachate generation process when approximations are made. The limitations of conventional prediction techniques emanate from their deterministic nature. This makes these models insensitive to uncertainty. The objective of this study is therefore to introduce a stochastic approach to the quantification of MSW generated and subsequent leachate generated from Zimbabwe's landfills. This will be achieved through the use of probability models supported by 10,000 Monte Carlo simulations.

### Materials and methods

A WBM model was developed on a spreadsheet equipped with Palisade's @Risk software [33], a risk analysis plugin capable of performing Monte Carlo simulations. The Monte Carlo method is deployed when an approximate solution to a mathematical problem that is difficult to solve analytically is required. Typically, experimentation would be time-consuming, costly, or unfeasible for such a problem. The problem may contain elements that exhibit chance in their behavior. The idea

behind these simulations is to generate values for uncertain elements in the model (the inputs) through random sampling. The basic steps involve modelling a system as a series of probability density functions (PDFs), repeatedly sampling from the PDFs and analyzing the outcomes [34-35]. The greater the number of runs the greater the confidence in the result. Since statistical sampling experiments are performed on a computer, time and resource savings can be attained as @Risk eliminates the need to run, test, and present several spreadsheets. In simple terms (Eq. 1) WBM states:

$$L = P - RO - ET - \Delta S - G \quad (\text{Eq. 1})$$

where L = post closure leachate volume per unit surface area of landfill (mm), P = volume of precipitation per unit surface area of landfill (mm), ET = volume lost through evapotranspiration per unit surface area of landfill (mm), RO = volume of surface runoff per unit surface area of landfill (mm),  $\Delta S$  = gain in moisture storage within soil and waste in a unit volume of landfill (mm) and G = volume of water consumed in landfill gas formation per unit surface area of landfill (mm).

The determination of these parameters is outlined in the following subsections.

#### 1) Prediction of MSW generated and landfilled

Total MSW generated from 1980 to 2015 was estimated using historical urban population data provided by the World Bank and per capita MSW generation data. The latter was estimated by first defining a probability distribution using @RISK's built-in distribution fitting feature on reported per capita generation values shown in Table 1. The annual quantity of landfilled MSW was determined by multiplying together the following terms by 365: total population, rate of urbanization, per capita MSW generation (probability

distribution function) and collection efficiency (probability distribution function).

A variation of a triangular distribution, called Trigen in @RISK [36] was used to model the collection efficiency defined by Trigen (a, b, c, p, q). The parameters represent the following: a is the practical minimum, b is the most likely value, c is the practical maximum value, p is the probability that the parameter value could be below a and q is the probability that the parameter value could be below c. Collection efficiencies dropped from at least 80 % (in the mid-1990s) to as low as 30 % in the mid-2000s [16]. Other reports cite the efficiency between 50 and 85 % [5, 27, 29]. Therefore for this study, Trigen (0.3, 0.75, 0.8, 0.1, 0.9) was assumed.

**Table 1** Reported MSW waste generation rates for Zimbabwe (Africa)

MSW generation rate (kg capita <sup>-1</sup> d <sup>-1</sup> )	Reference
0.70	[37]
0.50	[38]
0.50	[28]
0.53	[39]
0.31	[40]
0.50	[27]
0.79	[41]
0.29	[42]
0.53	[29]
0.44	[43]
0.60	[44]
0.42	[5]
0.64	[45]
0.70	[46]

## 2) Estimation of evapotranspiration

Thornthwaite's equation below was used to estimate ET. This is an indirect way of determining ET and the use of this equation which is inherently simple gives justifiable good results [47]. Direct methods of measuring ET are often expensive, highly demanding in terms of accuracy of measurement and require well-trained researchers. Other indirect methods (empirical

or semi-empirical equations) are only valid under specific climatic conditions and sites [48]. The complexity of alternative models or direct methods does not translate into more accurate results hence the choice of this equation. Instead of deterministic values for the terms in Eq. 2, probability distribution models defined from historical rainfall, temperature patterns and daylight hours were used. Akaike's Information Criterion (AIC) determined the best fitting distribution model.

$$PET = 16 \times \left(\frac{L}{12}\right) \times \left(\frac{N}{30}\right) \times \left(\frac{10T_{\alpha}}{I}\right)^{\alpha} \quad (\text{Eq. 2})$$

where PET = the estimated potential evaporation (mm/month),  $T_{\alpha}$  = the average daily temperature of the month being calculated ( $^{\circ}\text{C}$ ), N = the number of days in the month being calculated, L = the average day length of the month being calculated (h),  $\alpha = (6.75 \times 10^{-7}) \times I^3 - (7.71 \times 10^{-5}) \times I^2 + (1.792 \times 10^{-2}) \times I + 0.49239$  where  $I = \sum_{i=1}^{12} \left(\frac{T_{ai}}{5}\right)^{1.514}$  is the heat index which depends on the 12 monthly mean temperature  $T_{ai}$ . ET was estimated by assuming a uniform distribution, with limits  $0 < ET < PET$ . ET is unpredictable but is always less than or equal to PET.

## 3) Estimation of runoff and volume of water consumed during landfill gas formation

Typically, runoff coefficients range from 0.05 to 0.75 [49] hence a uniform distribution was assumed between these values. Ehrig's and Cossu et al. equations [50] below were used to estimate G. The mass of water consumed per  $\text{m}^3$  of landfill gas produced (W) is given by

$$W = \frac{(4a-b-2c+3d) \times \left(\frac{18}{4}\right) \times 1000}{(12a+b+16c+14d) \times G_e} \quad (\text{Eq. 3})$$

where  $G_e$  = the total gas quantity in  $\text{m}^3 \text{ ton}^{-1}$  of MSW ( $\text{C}_a\text{H}_b\text{O}_c\text{N}_d$ ) given by  $G_e = 1.868 \times C \times (0.014 T + 0.28)$ , C = mass (kg) of total

organic carbon per ton of MSW, and  $T$  = temperature in  $^{\circ}\text{C}$ . An approximate chemical formula was calculated for MSW using typical ultimate analysis data and Zimbabwe MSW composition data reported by previous work [9-10, 12, 14-19, 51-54].  $G$  was then calculated by dividing volume of water consumed by landfill surface area as shown in Eq. 4.

Uniform distributions for depth and landfilled-MSW density were used with of limits 3-6 m and 534-1,000  $\text{kg m}^{-3}$  respectively.

The following assumptions were made in developing the model: the only source of infiltration is precipitation falling directly on the surface area of landfill, groundwater does not enter the landfill, all water movement through the landfill is vertically downward, leachate recycling or co-disposal of liquid do not take place and the landfill is at field capacity at the start of calculations. Meteorological data are site specific, but due to unavailability of landfill site data, weather bureau data were used in line with common practice [49].

## Results and discussion

Results from 10,000 iterations are shown in Figures 2 to Figure 4. The trend in MSW generation from 1980-2015 depicted in Figure

2 shows that the quantity of MSW has been increasing steadily. The black region represents the 5-95 percentile and the grey depicts the 25-75 percentile for the simulations. The mean is the most-likely estimate of MSW generation. As shown in Figure 3(b), on average, about 291,259-540,037 tons  $\text{a}^{-1}$  of MSW has been landfilled since 1980. This amounts to roughly 13-16 million tons of MSW in total since 1980. Using deterministic models, roughly 989,000 tons and 490,000 tons were generated and landfilled in 2012 according to a study by Scarlet et al. [29]. Analysis of reported values reveals an average composition of 32.4 % putrescible, 16.2 % plastics, 8.6 % miscellaneous, 19.9 % paper and cardboard, 6.9 % metals, 4.0 % glass and ceramics, 2.1 % leather and rubber, 3.1 % textiles, 4.1 % yard waste and 4.5 % wood.

Reported MSW generation per capita ( $\text{kg capita}^{-1} \text{d}^{-1}$ ) figures follow a normal distribution with  $\mu$  and  $\sigma$  of 0.53 and 0.14, respectively. The calculated molecular formula in this study is  $\text{C}_{617}\text{H}_{1718}\text{O}_{620}\text{N}_{18}\text{C}_{17}$  and landfill gas ( $\text{CO}_2$  and  $\text{CH}_4$ ) quantity generated,  $G_e$ , is  $81.8 \text{ m}^3$  per ton of MSW. Previously, Scarlet et al. [29] reported  $66.7 \text{ Nm}^3 \text{ CH}_4$  per ton of MSW being generated.

$$\text{Landfill surface area} = \frac{1}{\text{depth of landfill (m)}} \times \frac{\text{landfilled-MSW (tons)}}{\text{density of waste (tons/ m}^3\text{)}} \quad (\text{Eq. 4})$$


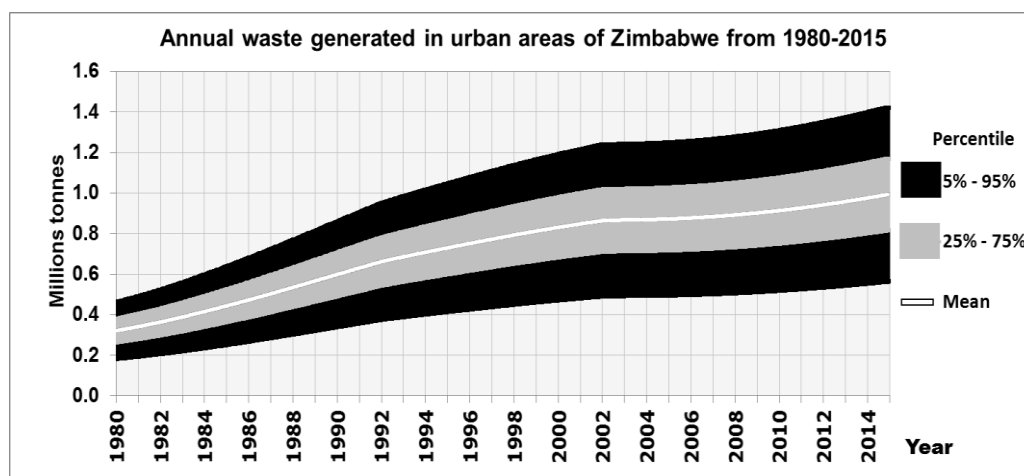


Figure 2 Summary trend for annual MSW generated.

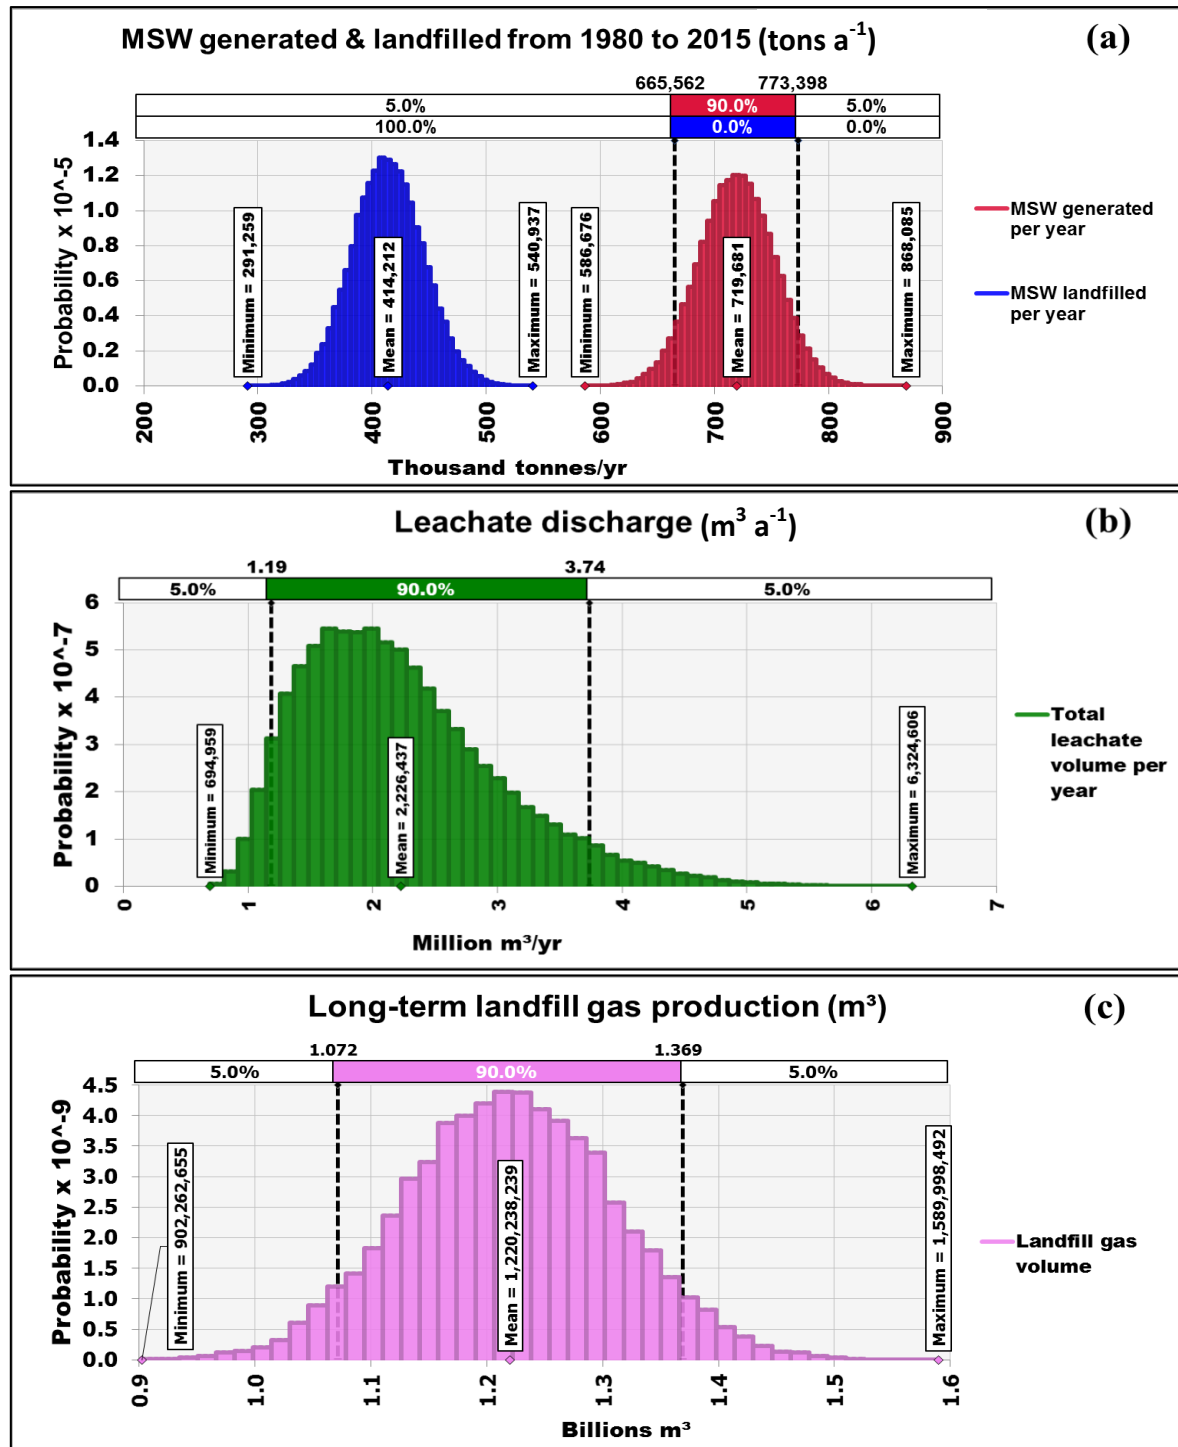

**Figure 3** Distribution probability of a) average generated and landfilled MSW  
b) leachate volume c) landfill gas production.

Calculated TOC and W are 74.7 kg per ton of MSW and 1.24 kg of water per cubic meter of landfill gas. At a 90 % confidence interval, 1.07-1.37 billion m<sup>3</sup> of landfill gas can potentially be released. Since most landfill sites are open dumps (where aerobic conditions


prevail), the predominate gas emitted is likely to be carbon dioxide. The volume of leachate generated is 1.19-3.74 million m<sup>3</sup> a<sup>-1</sup> at a 90 % confidence level as shown in Figure 3(b). This amounts to about 41-128 million m<sup>3</sup> of leachate discharge in total since 1980. The high

variability of leachate produced from the landfills can be attributed to the variation inherent to leachate generation which relies on hydrologic and climatic influences.

In another study, the average leachate volume discharged from a landfill in Harare (capital city) during the period 1983 to 2014 was estimated to be  $94,486 \text{ m}^3 \text{ a}^{-1}$  [55].

There are at least 20 official dumpsites corresponding to each urban settlement in Zimbabwe and countless illegal sites, hence the confidence in the estimates presented here. There is also reasonable agreement with the rule of thumb approach of assuming  $0.2\text{-}1.0 \text{ m}^3$  of leachate being generated for each cubic meter of waste landfilled [56]. Figure 4 is a cumulative distribution of the stochastic water

balance. At a 90 % confidence level, 381-571 mm per year of leachate is discharged as shown in Figure 4. ET lies between 390-707 mm. The average annual ET in neighboring South Africa was estimated to be 303 mm [57] for 2000-2012 using a different technique. This falls well within the range shown in Figure 4. The stochastic WBM methodology for estimating leachate volumes avoids the limitations of most empirical models, fundamentally flawed by their deterministic nature. Most of the data required in WBM is stochastic or poorly defined (temperature, heat index, precipitation, runoff coefficients). Therefore, the use of deterministic models and techniques must be treated with caution.

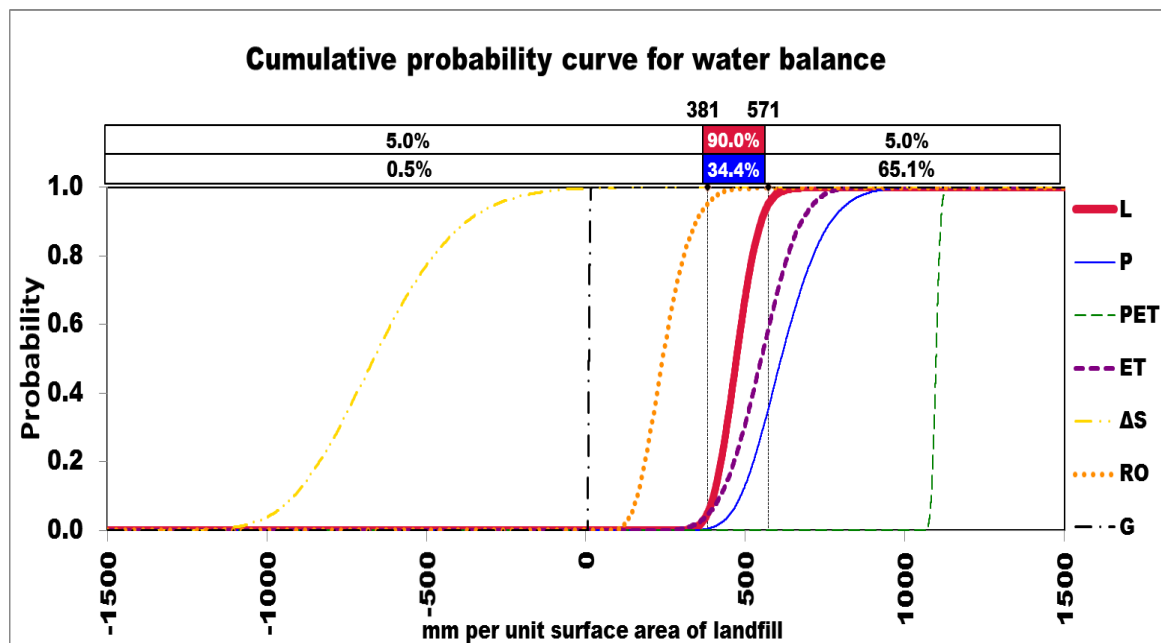

**Figure 4** Cumulative probability distribution for annual water balance.

## Conclusion

Using Monte Carlo simulations, 13-16 million metric tons of MSW have been landfilled since 1980. At a 90 % confidence interval, the leachate discharged from landfills is  $1.19\text{-}3.74 \text{ million m}^3 \text{ a}^{-1}$  or about  $41\text{-}128 \text{ million m}^3$  in total since 1980. It is necessary to stress that this article is an initial

approximation. This study could be used in the preliminary design of leachate control systems or to assess the impact of leachate on the environment. There is limited field data on the characteristics of landfill leachate in Zimbabwe, therefore, gathering of such data is highly recommended for future work.

## Acknowledgements

This study was financially supported by JSPS KAKENHI Grant Number 15H04067 and JSPS Core-to-Core Program B: Asia-Africa Science Platforms.

## References

- [1] World Bank. World development indicators. [Online] Available from: <http://api.worldbank.org/v2/en/country/ZWE?downloadformat=excel> [Accessed 6 August 2017].
- [2] United Nations. Zimbabwe country analysis working document final draft. 2014, [Online] Available from: [http://www.zw.one.un.org/sites/default/files/Publications/UNZimbabwe/Country%20Analysis\\_FinalReview\\_3Oct2014.pdf](http://www.zw.one.un.org/sites/default/files/Publications/UNZimbabwe/Country%20Analysis_FinalReview_3Oct2014.pdf) [Accessed 5 August 2017].
- [3] Eckes, A.E. The contemporary global economy: A history since 1980. 1<sup>st</sup> Edition. United Kingdom: Wiley-Blackwell, 2011, 77-78.
- [4] Masocha, M. Informal waste harvesting in Victoria Falls town, Zimbabwe: Socio-economic benefits. *Habitat International*, 2006, 30(4), 838-848.
- [5] Muchandiona, A. Challenges and opportunities in solid waste management in Zimbabwe's urban councils. MSc Thesis, University of Zimbabwe, 2013.
- [6] Chifamba, P.C. Trace metal contamination of water at a solid waste disposal site at Kariba, Zimbabwe. *African Journal of Aquatic Science*, 2007, 32(1), 71-78.
- [7] Kubare, M., Mutsvangwa, C., Masuku, C. Groundwater contamination due to lead (Pb) migrating from Richmond municipal landfill into Matsheumhlope aquifer: Evaluation of a model using field observations. *Drinking Water Engineering and Science Discuss.* 2010, 3, 251-269.
- [8] Matsa, M., Marambanyika, T. An assessment of the concentration levels of toxic chemicals within and around Gweru dumpsite in Zimbabwe. *Journal of Environmental Extension*, 2009, 8, 16-24.
- [9] Manyanhai, I.O., Sigauke, E., Munasirei, D. Analysis of domestic solid waste management system: A case of Sakubva high density suburb in the city of Mutare, Manicaland Province, Zimbabwe. *Journal of Sustainable Development in Africa* 2009, 11(2), 127-140.
- [10] Jerie, S. Analysis of enterprise profile and composition of solid waste generated in the informal sector of Gweru, Zimbabwe. *Journal of Waste Management*, 2014. 2014, 1-13.
- [11] Nyamombe, W.C., Gwisai, R.D. Assessing the source separation and recycling potential of household waste. A case study of Gadzema suburb in Chinhoyi, Zimbabwe. *Open Journal of Applied & Theoretical Environmental Sciences (OJATES)*, 2015, 1(1), 56-71.
- [12] Mangizvo, R.V. Challenges of solid waste management in the Central Business District of the City of Gweru in Zimbabwe. *Journal of Sustainable Development in Africa* 2007, 9(3), 134-145.
- [13] Mahamba, C. Characterisation and management of non-formal solid waste management disposal sites in Harare, Zimbabwe. MSc Thesis, University of South Africa, 2015.
- [14] Mangundu, A., Makara, E.S.M.S., Mangundu, M., Tapera, R. The Importance of integrated solid waste management in Independent Zimbabwe: The Case of Glenview, Area 8, Harare. *Global Journal of Biology, Agriculture and Health Sciences* 2013, 2(3), 85-92.
- [15] Mangizvo, R.V. Management Practices at the Mucheke municipal solid waste disposal Site in Masvingo City, in Zimbabwe. *Journal of Sustainable Development in Africa*, 2008, 10(2), 147-164.

- [16] Togarepi, S., Tsiko, R. A Situational analysis of waste management in Harare, Zimbabwe. *American Journal of Science* 2012, 8(4), 692-706.
- [17] Masocha, M. Solid waste disposal in Victoria Falls Town: Spatial dynamics, environmental impacts health threats and socio-economic benefits. M Phil Thesis, University of Zimbabwe, 2004.
- [18] Huvengwa, I. Solid waste management : An urban challenge, a case of Masvingo town. MSc Thesis, Bindura University of Science Education, 2012.
- [19] Takaedza, R.J. The solid waste management in Mubaira growth point, Chegutu Rural District Council. BSc Thesis, Midlands State University, 2014.
- [20] Makoni, F., Ndamba, J., Mbatl, P.A., Manase, G. Impact of waste disposal on health of a poor urban community in Zimbabwe. *East African Medical Journal*, 2004, 81(8), 422-426.
- [21] Makura, R. Analysing the challenges besetting solid waste management in Zimbabwe's urban areas: A Case Study of Warren Park Suburb, Harare. MSc Thesis, University of Zimbabwe, 2014.
- [22] Mubaiwa, A. Community based waste management in urban areas, in *Proceedings from the 2<sup>nd</sup> International Conference on Appropriate Technology*. 2006: Bulawayo, Zimbabwe. p. 99.
- [23] Zamba, B.F. Community participation in sustainable solid waste management in high density suburbs. The case of Mbare Harare, Zimbabwe. BSc Thesis, Midlands State University, 2014.
- [24] Makwara, E.C. Magudu, S. Confronting the reckless gambling with people's health and lives: Urban solid waste management in Zimbabwe. *European Journal of Sustainable Development*, 2013, 2(1), 67.
- [25] Mandeverere, B. An investigation into effectiveness of household solid waste management strategies in Harare, Zimbabwe. MSc Thesis, University of South Africa, 2015.
- [26] Kharlamova, M., Mada, S.Y., Grachev, V. Landfills: Problems, solutions and decision-making of waste disposal in Harare (Zimbabwe). *Biosciences Biotechnology Research Asia*, 2016, 13(1), 307-318.
- [27] Jingura, R.M., Matengaifa, R. Optimization of biogas production by anaerobic digestion for sustainable energy development in Zimbabwe. *Renewable and Sustainable Energy Reviews*, 2009, 13(5), 1116-1120.
- [28] Jingura, R.M., Musadamba, D., Kamusoko, R. A review of the state of biomass energy technologies in Zimbabwe. *Renewable and Sustainable Energy Reviews*, 2013, 26, 652-659.
- [29] Scarlat, N., Motola, V., Dallemand, J.F., Monforti-Ferrario, F., Mofor, L. Evaluation of energy potential of municipal solid waste from African urban areas. *Renewable and Sustainable Energy Reviews*, 2015, 50, 1269-1286.
- [30] Gwenzi, W., Chaukura, N., Mukome, F.N.D., Machado, S., Nyamasoka, B. Biochar production and applications in sub-Saharan Africa: Opportunities, constraints, risks and uncertainties. *Journal of Environmental Management*, 2015, 150, 250-261.
- [31] Bagchi, A., Design of landfills and integrated solid waste management. 3<sup>rd</sup> Edition. New Jersey: John Wiley and Sons, 2004, 274-289.
- [32] Nyamapfene, K. Agroclimatic zones of Zimbabwe and potential for agroforestry. in *International Workshop on the Applications of Meteorology to Agroforestry Systems Planning and Management*, Nairobi (Kenya), 9-13 Feb 1987. 1989. ICRAF.

- [33] Palisade Corporation, User's Guide: @ RISK risk analysis and simulation add-in for Microsoft® Excel Version 7. NY USA, 2016. [Online] Available from: [http://www.palisade.com/downloads/documentation/75/EN/RISK7\\_EN.pdf](http://www.palisade.com/downloads/documentation/75/EN/RISK7_EN.pdf) [Accessed 6 August 2017].
- [34] Wajs, W., Bieda, B., Tadeusiewicz, R. Project cost analysis for Niepolomice municipal solid waste using the Monte Carlo simulation. WIT Transactions on Ecology and the Environment, 2000. 45.
- [35] Harrison, R.L., Introduction to Monte Carlo simulation. AIP conference proceedings, 2010, 1204, 17-21.
- [36] Vose, D., Risk analysis: A quantitative guide. 3<sup>rd</sup> Edition. England: John Wiley & Sons, 2008, 404-405.
- [37] Simelane, T., Mohee, R. Future directions of municipal solid waste management in Africa. Africa Institute of South Africa, 2012(Briefing No 81), 1-5.
- [38] Mshandete, A.M., Parawira, W. Biogas technology research in selected sub-Saharan African countries - A review. African Journal of Biotechnology, 2009, 8(2), 116-125.
- [39] Hoornweg, D., Bhada-Tata. What a waste : A global review of solid waste management. 2012: Washington, DC: World Bank. p. Annex J.
- [40] Practical Action, Department for international development contract: Research development and design of a simple solid waste incinerator. 1999.
- [41] Mohee, R., Simelane, T., eds. Future directions of municipal solid waste management in Africa. 2015, Africa Institute of South Africa: Pretoria, South Africa.
- [42] IPCC, N.G.G.I.P., 2006 IPCC Guidelines for national greenhouse gas inventories, L.B. Simon Eggleston, Kyoko Miwa, Todd Ngara, Kiyoto Tanabe, Editor. 2006: IGES, Japan.
- [43] Friedrich, E., Trois, C. Quantification of greenhouse gas emissions from waste management processes for municipalities - A comparative review focusing on Africa. Waste Management, 2011, 31(7), 1585-1596.
- [44] Hoornweg, D., Bhada-Tata, P., Kennedy, C. Peak waste: When is it likely to occur? Journal of Industrial Ecology, 2015, 19(1), 117-128.
- [45] International Energy Agency, Annex I: Municipal solid waste potential in cities. [Online] Available from: [https://www.iea.org/media/etp/etp2016/AnnexI\\_MSWpotential\\_web.pdf](https://www.iea.org/media/etp/etp2016/AnnexI_MSWpotential_web.pdf) [Accessed 6 August 2017].
- [46] Achankeng, E., Globalization, urbanization and municipal solid waste management in Africa. African Studies Association of Australasia and the Pacific, 2003 Conference Proceedings - African on a Global Stage, 2003, 1-22.
- [47] Pereira, A.R., Â. Paes De Camargo, An analysis of the criticism of thornthwaite's equation for estimating potential evapo-transpiration. Agricultural and Forest Meteorology, 1989, 46(1), 149-157.
- [48] Allen, R.G., Pereira, L.S., Raes, D., Smith, M. Crop evapotranspiration-Guidelines for computing crop water requirements-FAO Irrigation and drainage paper 56. FAO, Rome, 1998, 300(9), D05109.
- [49] O'Leary, P.R., Tchobanoglous, G. Land-filling. In: Tchobanoglous, G., Kreith F., Handbook of solid waste management. 2<sup>nd</sup> edition. USA: McGraw-Hill, 2002.
- [50] Safari, E., Baronian, C. Modelling temporal variations in leachate quantity generated at Kahrizak landfill. Proceedings of International Environmental Modeling Software, Passau, 7-9 April, 2002, 482-484.
- [51] Mwanza, B., Phiri, A. Design of a waste management model using integrated solid

- waste management: A case of Bulawayo City Council. *International Journal of Water Resources and Environmental Engineering*, 2013, 5(2), 111-118.
- [52] Sango, I. Analysis of the solid waste management practices in Chinhoyi: Bridging the missing link. *Economia. Seria Management*, 2010, 13(2), 332-347.
- [53] Mbohwa, C., Zvigumbu B. Feasibility study for waste incinerator plant for the production of electricity in Harare, Zimbabwe. *Advanced Materials Research*, 2007, 18-19, 509-518.
- [54] Organization, I.L. Start your waste recycling business technical handouts. 2007. [Online] Available from: <http://www.gdrc.info/docs/waste/008.pdf> [Accessed 5 August 2015].
- [55] Chihanga, T.F. An investigation of groundwater vulnerability within the vicinity of a landfill: A case study of Pomona landfill, Harare. MSc Thesis, University of Zimbabwe, 2015.
- [56] Brennan, R., Healy, M.G., Morrison, L., Hynes, S., Norton, D., Clifford, E. Management of landfill leachate: The legacy of European Union Directives. *Waste Management*, 2016, 55, 355-363.
- [57] Jovanovic, N., Mu, Q., Bagan, R.D.H., Zhao, M. Dynamics of MODIS evapotranspiration in South Africa. *Water SA*, 2015, 41(1), 79-90.